

CP-602U-I Series

2-port CAN Interface Universal PCI boards with 2 KV isolation



- > CAN 2.0A and CAN 2.0B supported
- > Two independent CAN communication ports
- > CAN transfer rate up to 1 Mbps
- > 2 KV optical isolation protection
- > LED for transmit/receive status on each port
- > Optional 120 ohm terminal resistor for CAN bus network
- > DLL library and examples included
- > Windows driver provided



Overview

Moxa's new CP-602U-I CAN (Controller Area Network) interface board supports the Universal PCI interface. As a stand-alone CAN controller, the CP-602U-I is a cost-effective solution that provides two active CAN controllers with a DB9 connector on the same board. The CP-602U-I CAN interface board uses the NXP SJA1000 and transceiver

PCA82C251, which provide the bus arbitration and error detection. The -40 to 85°C wide operating temperature (CP-602U-I-T only) and 2 KV isolation make the boards suitable for use in harsh industrial environments.

Specifications

Hardware

Card Interface: Universal PCI

Connectors: DB9 male x 2

Ports: 2

CAN Controller: NXP SJA1000

CAN Transceiver: PCA82C251

CAN Specification: CAN 2.0 A/B

Signal Support: CAN_H, CAN_L, GND

Transfer Rate: 1 Mbps

Max. Number of Boards per PC: 4

Optical Isolation: 2 KV

Termination Resistor: 120 ohm (selected by jumper)

Driver Support

Operating Systems: Windows 2012 x64, XP/2003/Vista/2008/7/8 x86/x64

Note: Please refer to Moxa's website for the latest driver support information.

Software

Operating Systems: Windows 2000, Windows XP/2003/Vista/2008/7 (x86 and x64)

Libraries: Visual C/C++, Borland C/C++

Physical Characteristics

Dimensions: 80 x 120 mm (3.15 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Altitude: Up to 2000 m

Note: Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

Standards and Certifications

EMC: CE, FCC

EMI: EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class B

EMS: IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Green Product: RoHS, CRoHS, WEEE

MTBF (mean time between failures)

Time: 1,989,990 hrs

Database: Telcordia (Bellcore), GB

Power Requirements

Power Consumption: 365 mA @ 5 VDC


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

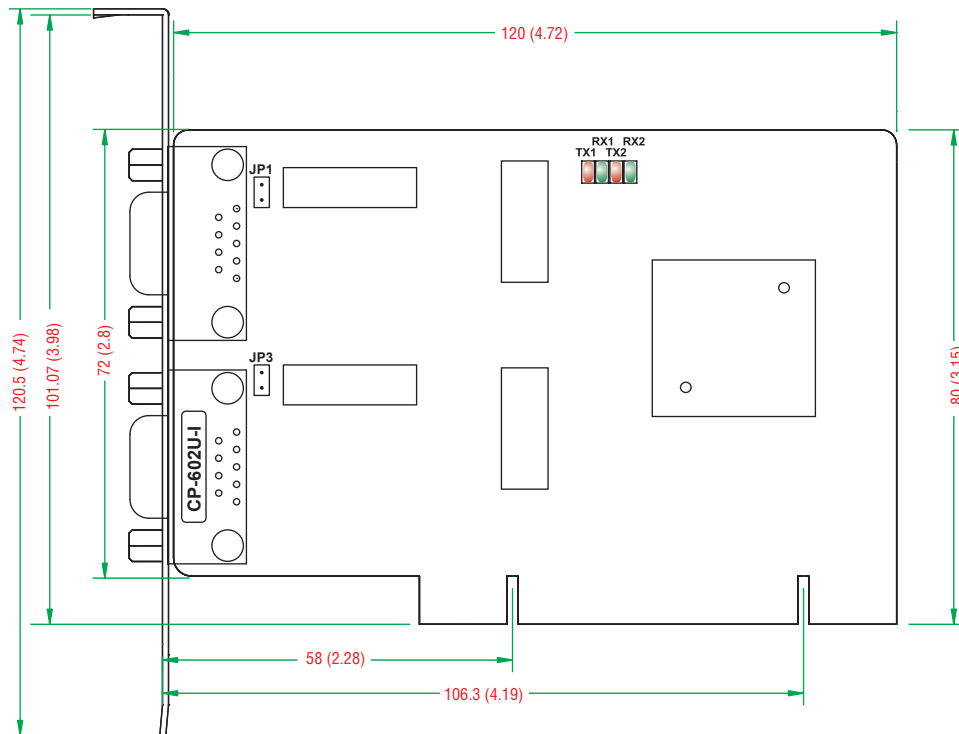

Ordering Information

Available Models

CP-602U-I: 2-port CAN interface Universal PCI board, with 2 KV isolation protection, 0 to 55°C operating temperature

CP-602U-I-T: 2-port CAN interface Universal PCI board with 2 KV optical isolation protection, -40 to 85°C operating temperature

Package Checklist

- 1 Universal PCI board with standard bracket
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

Pin Assignment

PIN	Signal
2	CAN L
3	CAN GND
5	Shield
7	CAN H

DB9 male

